

RADICI'S STILES

MILANO



MILANO

SPECIFICATION

Quality		: MILANO
Product definition		: tufted- colour placement loop pile
Gauge		: 1/10"
No. of tufts	ISO 1763	: ± 142920/m2
Pile fibre		: 100% polyamide 6 – solution dyed
Pile weight	ISO 8543	: 810 gr/m2 ± 5%
Pile height	ISO 1766	: 2.60 mm ± 5%
Primary backing		: PET woven – ± 145gr/m2
Tile backing		: Polyflex
Total thickness	ISO 1765	: 7.90 mm ± 5%
Total weight	ISO 8543	: 4712 gr/m2 ± 7,5%
Tile size		: 50 x 50 cm (± 19.7" x 19.7")
Tiles per box		: 20

PERFORMANCE

Use classification	method en 1307	: 33
Castor chair test	EN 985	: A, continuous use
Abrasion	ISO 12951	: pass
Vettermann test	ISO 10361/EN 1471	: pass
Thermal isolation	ISO 8302	: 0.088 m2 K/W
Dimensional stability	EN 986	: pass
Luxery/Comfort	EN 1307	: classe 1
Sound Absorption	ISO 140-8	: 24 dB

ELECTROSTATIC PROPERTIES

Walk on test	ISO 6356	: < 2,0 kV
Horizontal electrical resistance	ISO CD 10965	: 3x108 Ω
Vertical electrical resistance	ISO CD 10965	: 4x1010 Ω
Static loading		: anti-static

FLAME PROPERTIES

Reaction to fire	EN ISO 11925-2	
	EN ISO 9239-1	: Bfl – s1
Hot metal nut test	BS 4790	: Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	: > 5
Rubbing, dry	ISO 105 X12	: 4.5
Rubbing, wet	ISO 105 X12	: 5.0
Shampoo	BS 1006	: 4.5
Water	ISO 105 E01	: 4.5
Water stains	TNO W 6024	: 5.0

GENERAL

Recommended maintenance:	Best results are obtained when cleaned with a dry shampoo method.
Pile direction:	Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard.
Laying instructions:	Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m2 it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

MINIMUM ORDER FOR SPECIAL FELT BACKING*:

200 sqm

SPECIAL SIZE AVAILABLE FOR MINIMUM 500 sqm*:

48x48cm 60x60cm 60,96x60,96cm (FELT BACKING OPTION AVAILABLE)


SPECIAL SIZE AVAILABLE FOR MINIMUM 100 sqm*:

100x100cm (FELT BACKING OPTION AVAILABLE)

SPECIAL SIZE AVAILABLE FOR MINIMUM 200 sqm*:

100x50cm 100x25cm 25x100cm 100X200cm 100X150cm (FELT BACKING OPTION AVAILABLE)

*PLEASE CONSIDER 2% PRODUCTION OVERAGE

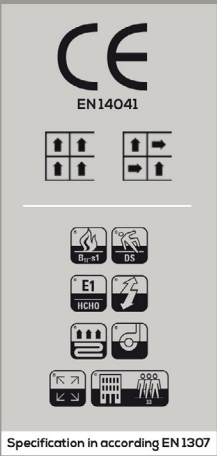

18110



18104




18006




18109



18002

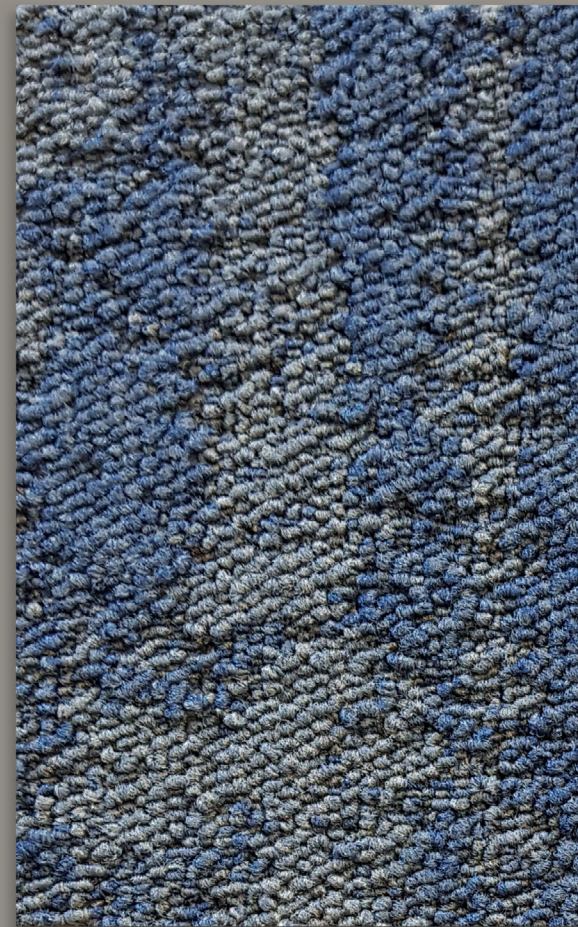

18102

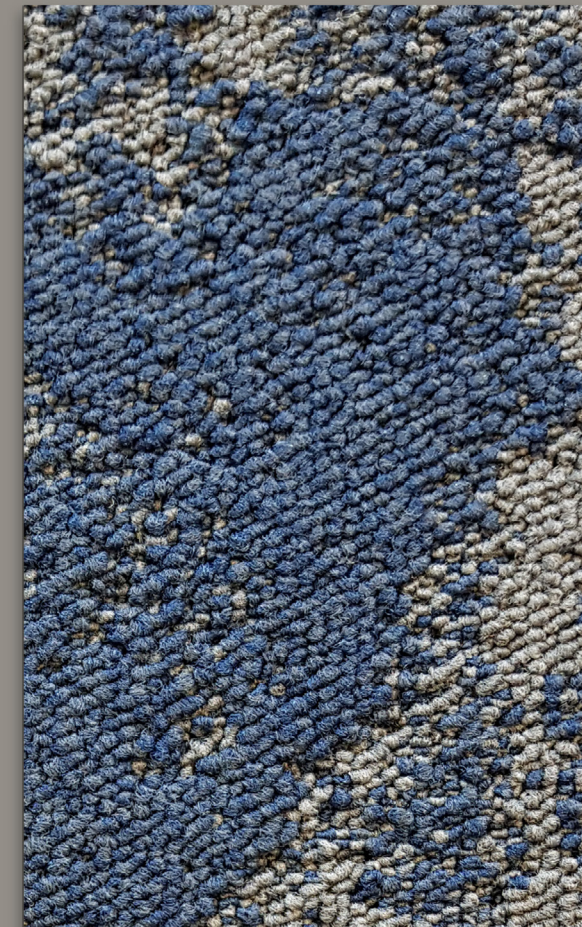


18108



18001



18107

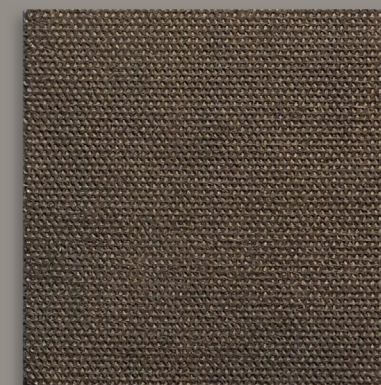

Polyflex Backing



Felt Backing

